

## North Haiwee Dam No.2 Construction Project



Los Angeles Aqueduct Realignment

[Link to Google Map](#)

### Overview

North and South Haiwee Reservoirs are the southernmost Los Angeles Aqueduct (LAA) reservoirs in Inyo County separated by Merritt Dam. Haiwee Reservoirs are approximately 5 miles south of the intersection of US-395 Highway and SR-190 and just east of US-395 Highway. The construction of North Haiwee Dam was first completed in February 1913.

### Project Descriptions

The purpose of the Project is to contain the water in North Haiwee Reservoir in the event the existing North Haiwee Dam fails due to a seismic event.


A new earthfill embankment dam will be constructed north of the North Haiwee Dam to enhance seismic reliability. The project will realign Cactus Flats Road and part of the Los Angeles Aqueduct channel, and will include the following phases:

- 1. Phase I – Cactus Flats Road Realignment and US 395 Hwy Improvements (Completed)**
  - Approximately 4,400 feet of Cactus flats Road were realigned.
  - Constructed a left-hand turn lane on US 395.
- 2. Phase II – Realignment of a portion of the Los Angeles Aqueduct (Completed)**
  - Approximately 1,950 feet of the existing Los Angeles Aqueduct was realigned to match existing LAA channel dimensions.
- 3. Phase III- North Haiwee Dam No. 2 Construction (In Progress)**
  - An earth filled dam located 800 feet north of the existing dam approximately 1,970 feet long, 42 feet high, and 30 feet wide.

## Project Schedule

Item	Status	Date
Final EIR (Environmental Impact Report)	Completed	July 24, 2018
Final NEPA (National Environmental Policy Act)	Completed	September 30, 2019
Advertise Date	Completed	February 12, 2020
Bid Opening	Completed	April 17, 2020
Start of Construction		January 20, 2021
Phase 1	Completed	December 16, 2022
Phase 2	Completed	October 29, 2024
Phase 3	In Progress	-----
Anticipated End of Construction		December 16, 2028

## Project Location

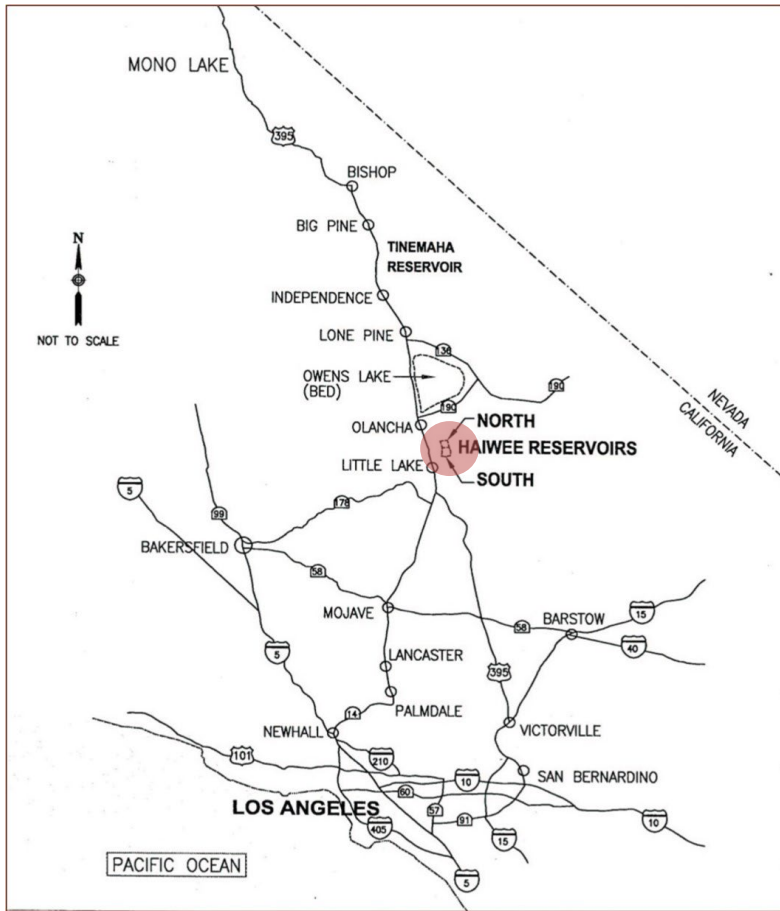

## Contact Information:

**Construction Manager:** Matthew Venable | 213-442-0205 | [Mathew.Venable@ladwp.com](mailto:Mathew.Venable@ladwp.com)

**Project Manager:** Joe Gobran | 213-367-0895 | [Yousef.Gobran@ladwp.com](mailto:Yousef.Gobran@ladwp.com)

**Superintendent:** Kevin Everett | 801-332-0703

**Community Affairs:** Lesly Figueroa | 213-982-4076 | [Lesly.Figueroa@ladwp.com](mailto:Lesly.Figueroa@ladwp.com)